






# TA2288-01 Despatcher Audio Console User Guide

Set up individual radio identity numbers and group calls using the LDT. See the LDT Operation Manual (M1542-805-xxx) for instructions.

Use the Despatcher Audio Console to verbally communicate with radio users.

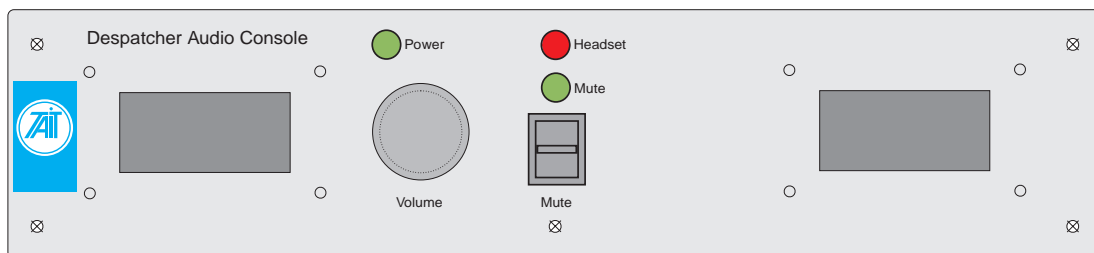

## Normal Mode

1. Make sure the microphone is plugged into the RJ-11 Microphone socket on the left side panel.
2. Using the LDT, select the group or individual radio identity number you wish to call.
3. During the call, press the transmit button on the microphone while speaking, and release the button to hear the radio user speaking.
4. If required, an optional PTT footswitch can be inserted into the socket on the rear panel, so that the footswitch is pressed to transmit instead of the button on the microphone.
5. You will hear audio cues, confidence tones and emergency signals sent by the LDT through the Console speaker. Pressing the Mute button on the Console has no effect when the Console is operating in Normal Mode.

## Headset Mode

1. Make sure the headset is plugged into the RJ-22 Headset socket on the left side panel.
2. Using the LDT, select the group or individual radio identity number you wish to call.
3. Talk and listen to the radio user through the headset microphone.
4. To mute the headset microphone, either:
  - **hold down** the Mute button on the front panel, for as long as required. Release the switch to unmute the headset microphone.
  - **latch** the Mute switch by moving the switch to the 'up' position. The microphone is muted until you return the switch to the horizontal position.
5. You will hear audio cues and confidence tones sent by the LDT through the headset. If the headset is unplugged, the Console reverts to Normal Mode and these tones come through the Console speaker.

**Note:** Emergency signals always come through the speaker, whether or not the headset is plugged in.